

516,486

Rec'd PCTO 30 NOV 2004

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
11 December 2003 (11.12.2003)


PCT

(10) International Publication Number
WO 03/101509 A1

- (51) International Patent Classification⁷: A61M 1/02, (74) Agent: KENNEDYS PATENT AGENCY LIMITED;
A61J 1/00, A61M 5/168 Floor 5 Queens House, 29 St Vincent Place, Glasgow G1 2DT (GB).
- (21) International Application Number: PCT/GB03/01923
- (22) International Filing Date: 2 May 2003 (02.05.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0212597.9 31 May 2002 (31.05.2002) GB
- (71) Applicant and
(72) Inventor: MCGUIRE, John [GB/GB]; 33 Hawthorn Drive, Girvan, Ayrshire KA26 0BE (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: APPARATUS FOR HOLDING A CATHETER BAG

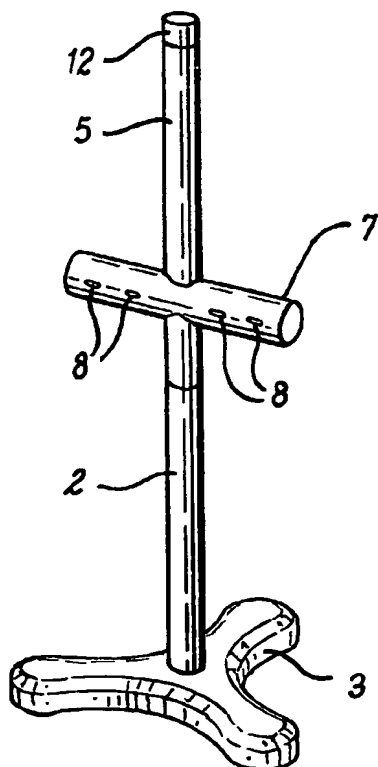

(57) Abstract: Apparatus for holding a medical bag, such a catheter or drip bag, is generally depicted at (1), and comprises a first lower component (2), second upper component (5), indicator means (12) and attachment means for the medical bag (8). The upper component is adapted to move relative to the lower component as the contents of the catheter or drip bag increase or decrease, and this activates the indicator means which acts as a warning that the contents of the bag require emptying or changing.

WO 03/101509 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Published:

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

1 Apparatus for holding a catheter bag

2
3 The present invention relates to medical apparatus. More
4 particularly the present invention relates to apparatus
5 for holding a catheter or drip bag, which can be used to
6 detect when the contents of the bag reach a certain
7 level, and to report when the bag requires emptying or
8 filling.

9
10 A catheter is a thin and flexible tube inserted into a
11 bodily passage or cavity in order to allow fluids to pass
12 into or out of it. The catheter is generally connected to
13 a catheter bag, which collects the fluids passing out, or
14 a drip bag which stores the fluids passing into the body.
15 Catheterisation is commonly used in hospitals, care homes
16 and medical centres for seriously ill patients, or those
17 who are confined to a bed or wheelchair.

18
19 As catheter or drip bags have a finite capacity (usually
20 around 2000 ml) nursing and/or care staff must check the
21 bags on a regular basis, to empty them if full or to fill
22 them if empty.

23

1 Where the catheter is being used for excretion
2 collection, i.e. for the passage of fluids out of the
3 body, overfilling of the catheter bag can cause a
4 backflow through the tubing and back into the body, and
5 particularly into the bladder and kidney. This can
6 result in infection of the urinary tract of the patient,
7 which may necessitate a further treatment. As the
8 patient will need to remain in the hospital for longer
9 than would otherwise be necessary, the cost of caring for
10 the patient is greatly increased and valuable resources
11 are wasted on treating what is, essentially an avoidable
12 situation.

13
14 However in busy hospitals or care homes, it may be
15 difficult for the nursing staff to check the catheter or
16 drip bags as often as would be desirable. The need to
17 visit every patient's bed to check the contents of the
18 bag on a regular basis uses up valuable staffing time. A
19 further problem lies in the fact that, at present,
20 catheter bags are often stored under the bed of the
21 patient. This adds to the inconvenience to nursing staff
22 who must actively go around every bed and pull out the
23 bag to check its contents.

24
25 It is therefore an object of the present invention to
26 provide an apparatus, which can be used to hold a
27 catheter or drip bag in a position where the contents can
28 be easily viewed. An associated object of the present
29 invention is to provide an apparatus, which can be used
30 to detect when the contents of the catheter or drip bag
31 reach a certain level and which provides an indication or
32 warning when the bag requires emptying or filling.

33

1 According to a first aspect of the present invention,
2 there is provided apparatus capable of indicating when
3 the contents of a medical bag reach a certain level, the
4 apparatus comprising indicator means, and a first and
5 second component, wherein the first component has
6 attachment means for holding the medical bag and is
7 adapted to move relative to the second component as the
8 contents of the medical bag change, wherein movement of
9 the first component activates the indicator means.

10
11 Typically the medical bag is of the type commonly known
12 as a catheter bag or a drip bag.

13
14 Preferably the first and second components are hollow
15 tubulars.

16
17 Preferably, as the contents of the medical bag fill, in
18 the case of a catheter bag, or empty, in the case of a
19 drip bag, the first component moves in a substantially
20 vertical direction relative to the second component.

21
22 The first and second components may be manufactured from
23 a metal or plastics material. Preferably, the hollow
24 tubulars are manufactured from stainless steel.

25
26 Preferably the first and second components are arranged
27 such that the first component is positioned above and
28 engages with the second component.

29
30 In a preferred embodiment the lowermost region of the
31 first component is positioned substantially within the
32 uppermost region of the second component. In order to
33 facilitate this the diameter of at least the lowermost

1 region of the first component may be smaller than the
2 diameter of at least the uppermost region of the second
3 component.

4
5 In an alternative embodiment the lowermost region of the
6 first component is positioned substantially over the
7 uppermost region of the second component. In order to
8 facilitate this the diameter of at least the lowermost
9 region of the first component may be larger than the
10 diameter of at least the uppermost region of the second
11 component.

12
13 Preferably a compression spring is located within the
14 second component.

15
16 Preferably one of either the first or second component
17 contains a magnetic array. Typically, the other of the
18 first or second component contains a magnetic detector or
19 sensor.

20
21 Preferably the magnetic detector or sensor is a read
22 switch.

23
24 Preferably the first component makes contact with the
25 compression spring. Typically the first component sits
26 on the compression spring.

27
28 Preferably the compression spring is calibrated.

29
30 Preferably the indicator means is activated when the
31 magnetic detector or sensor comes into proximity with the
32 magnetic array.

33

1 The indicator means may comprise one or more indicator
2 lights or an audible signal.

3
4 In one embodiment the magnetic detector or sensor and
5 magnetic array are brought into proximity with each other
6 as the bag fills. As it fills, the weight of the bag
7 moves the first component in a substantially downward
8 direction on the compression spring located in the second
9 component. This causes the magnetic detector or sensor
10 to come into proximity with the magnetic array.

11
12 In an alternative embodiment the magnetic detector or
13 sensor and magnetic array are brought into proximity with
14 each other as the bag empties. As it empties, the
15 reduction in weight of the bag moves the first component
16 in a substantially upward direction on the compression
17 spring located in the second component. This causes the
18 magnetic detector or sensor to come into proximity with
19 the magnetic array.

20
21 The indicator means may be battery powered.

22
23 Optionally the indicator means is located on one or both
24 of the upper or lower components. In an alternative
25 embodiment the indicator means is located in a remote
26 location to the apparatus.

27
28 The apparatus may also comprise a third component. The
29 indicator means may be located on the third tubular
30 component. Where the indicator means is battery
31 operated, battery access may be positioned in the third
32 tubular component.

33

1 Preferably the apparatus is free standing. To facilitate
2 standing, the lower component may have a base. The base
3 may have a plurality of feet.

4
5 An example embodiment of the present invention is
6 described with reference to the following Figures, in
7 which:

8
9 Figure 1 is a pictorial view of the apparatus of the
10 present invention;

11
12 Figure 2 is an engineering drawing of the apparatus from
13 the side;

14
15 Figure 3 is an engineering drawing of the apparatus
16 viewed at an angle;

17
18 Figure 4 is an engineering drawing of the apparatus from
19 the back;

20
21 Figure 5 is an engineering drawing of the apparatus from
22 below;

23
24 Figure 6 is an exploded view of the apparatus, and

25
26 Figure 7 illustrates the tubular used in connection with
27 a drip bag.

28
29 Referring firstly to Figure 1, the apparatus for holding
30 a medical bag such as a catheter or drip bag is generally
31 depicted at 1. The apparatus comprises a first lower
32 component 2, which in the depicted embodiment is
33 comprised of a hollow tubular, mounted on a base 3. The

1 base 3, supports the apparatus and may also have feet 4
2 to improve grip. The feet may be manufactured from a
3 rubber material. A second upper component 5 is also
4 comprised of a hollow tubular. In the depicted
5 embodiment the lowermost part of the upper component is
6 inserted or positioned in at least the uppermost part of
7 the lower component 2. At least the lower portion of the
8 upper component is generally smaller in diameter than at
9 least the upper portion of the lower component and as a
10 result the upper component can move relative to the lower
11 component in the direction indicated by arrow A. Both
12 parts 2 and 5 are manufactured from stainless steel,
13 which has advantageous hygienic properties. However it
14 is recognised that the apparatus may also be manufactured
15 from other metal materials or plastic. The upper and
16 lower component may be welded or secured by other means
17 which further aids hygiene. The base 3, may be
18 manufactured from aluminium. The components and base may
19 also be coated by a sterile coating to increase hygiene
20 and to allow the apparatus to be moved from ward to ward
21 without the risk of cross infection. The base of the
22 apparatus may optionally have wheels to permit easy
23 movement.

24
25 Figures 2 to 5 show the apparatus from a number of
26 different angles.

27
28 The upper component can move in a vertical direction
29 relative to the lower component, as illustrated by arrow
30 A, due to the inclusion of a compression spring 6 which
31 in the depicted embodiment is located within the lower
32 component. The upper component sits on the compression
33 spring. A magnetic array 11 is also contained within the

1 apparatus. In the depicted embodiment (Figure 6) the
2 magnetic array is located within the lower component,
3 although it in an alternative embodiment the magnetic
4 array may be located within the upper component. In the
5 depicted embodiment the magnetic array is provided as a
6 circular magnet cluster. Also located within the
7 tubulars and associated with the compression spring are
8 stop ring 9, and bushes 10. The apparatus will have 360°
9 rotational movement.

10
11 The apparatus also contains a magnetic sensor or detector
12 18 which may take the form of one or more read switches
13 (otherwise known as reed switches). Where the magnetic
14 array is located within the lower component the magnetic
15 sensor or detector will be located in the upper component
16 and vice versa.

17
18 The upper 5 component has a t-bar 7, on which are located
19 one or more attachment means 8. A standard catheter or
20 drip bag, of the type commonly used in hospitals or care
21 homes can be mounted on the apparatus using the
22 attachment means 8. The attachment means 8 may take the
23 form of pegs, clips or hooks.

24
25 In the depicted embodiment, indicator means 12 is
26 activated when the magnetic sensor or detector 18, which
27 in the depicted embodiment is located in the upper
28 component, comes into the proximity of the magnetic array
29 11, in the lower component. As the weight of the catheter
30 bag increases as it fills the upper component is moved in
31 a downward direction on the compression spring. This
32 causes the magnetic sensor or detector in the upper
33 component to move towards the magnetic array in the lower

1 component. In other words as the catheter bag fills,
2 and the volume of the contents of the catheter bag
3 increases, the increased weight of the bag will pull
4 upper component 5 in a downward direction towards lower
5 component 2 on compression spring 6, in the direction of
6 arrow B. It will be appreciated that the positioning of
7 the magnetic array and magnetic sensor or detector could
8 equally be reversed, such that the magnetic array is
9 located in the upper component and the magnetic sensor or
10 detector is located in the lower component.

11

12 When the magnetic array come into close proximity with
13 the magnetic detector or sensor the indicator means is
14 activated, which notifies nursing or care staff that the
15 contents of the bag have reached a particular level and
16 require emptying. The position of the read switch and
17 magnetic array within the components is such that this
18 will occur when contents of the bag reach a predetermined
19 quantity. Activation will typically occur through the
20 generation of an electric current, and the hollow
21 tubulars are adapted to receive one or more batteries.
22 The batteries may be standard or rechargeable. In an
23 example embodiment, using standard sized catheter bags
24 (2000 ml), activation when the contents of the bag reach
25 1800 ml. As many catheter bags can hold 2000ml of fluid,
26 activation of the indication means when the contents of
27 the bag reach 1800 ml gives the nursing or care staff
28 time to empty the bag before it becomes entirely full and
29 backflows into the associated tubing. However it should
30 be recognised that the calibration of the spring can be
31 changed, and that the apparatus is not limited to work at
32 these volumes. The apparatus may be adapted to activate

1 the indication means when the capacity of the bag is less
2 or more than 1800 ml depending on the situation.

3
4 In an alternative embodiment, where fluid (such as plasma
5 or saline) is being passed into the body, the weight of
6 the bag will gradually decrease as the medical bag
7 empties and the volume of the contents of the bag
8 decreases. In this embodiment the upper component 5 will
9 move in the direction of arrow C, as less weight is
10 exerted on compression spring 6. The magnetic array and
11 magnetic detector or sensor will be positioned within the
12 first and second components such that as the upper
13 component moves in direction C, they are brought into
14 proximity with each other. When the magnetic array comes
15 into close proximity with the magnetic detector or sensor
16 the indicator means is activated, to notify nursing or
17 care staff that the contents of the bag are low and it
18 requires filling.

19
20 It is also recognised that alternative embodiments of the
21 apparatus may be provided where activation of the
22 indicator means is effected by a method other than the
23 method which uses magnets and sensors depicted in the
24 Figures. For example in an alternative embodiment the
25 magnetic array and detector may be replaced by a simple
26 mechanical switch which is moved from an off to an on
27 position when the upper component moves to a
28 predetermined position relative to the lower component.
29 The switch may be located in either of the upper or lower
30 components and is moved to the on position when the upper
31 component reaches a certain predetermined position
32 relative to the lower component.

33

1 In the depicted embodiment, the indication means
2 comprises one or more warning lights 12 provided as one
3 or more LED lens. The warning lights are located on the
4 entire circumference of the tubular component to provide
5 360° visibility. Three warning lights of red, amber and
6 green, are provided in the depicted embodiment. These
7 will provide an escalating level of warning relating to
8 the contents of the bag. For example, using the Figures
9 given above, at 1600 ml the green light may be activated.
10 At 1700 ml the amber light may be activated and at 1800
11 ml the red light may be activated. The volume at which
12 the indicator is activated may be altered as desired.
13 This will give nursing staff an advance indication of how
14 full the catheter bag is. Alternatively, the indication
15 means may be flashing light. The indicating means may
16 also comprise a buzzer or some other audible signal. It
17 will be appreciated that the use of lights or buzzers are
18 particularly beneficial for use at night. The indicator
19 will de-activate once the bag is drained or replaced.
20
21 The apparatus may also comprise a third tubular component
22 as shown in Figure 7. The third tubular component 13
23 will typically have a first end 14 which can be attached
24 to the stand, and a second end 15 to which the catheter
25 or drip bag can be attached. The first end may be
26 attached to the attachment means 8 on the t-bar 7. The
27 tubular is hollow and can hold one or more batteries (not
28 shown). In this embodiment a tension spring is located
29 within the hollow tubular and an indicator means
30 typically being a LED lens 17 is provided on the tubular
31 body. The first and second ends typically carry hooks
32 16, clamps or the like which facilitate attachment to the
33 catheter or drip bag and stand. The indicator means will

1 be activated when the contents of the bag reach a certain
2 level and the weight the third component exerts on the
3 upper component sufficiently increases or decreases to
4 activate the indicator in the manner described above.

5
6 An indicator means may also be located in a remote
7 location, for example at a nursing station, so that
8 nursing and care staff can monitor all patients within a
9 ward without having to undertake a ward round. This will
10 greatly reduce the time spent by nursing staff monitoring
11 patients, as they will not need to attend individual beds
12 to check whether individual bags require emptying.

13
14 Further modifications and improvements may be
15 incorporated without departing from the scope of the
16 invention herein intended.

CLAIMS

1. Apparatus capable of indicating when the contents of a medical bag reach a certain level, the apparatus comprising indicator means and a first and second component, wherein the first component has attachment means for holding the medical bag and is adapted to move relative to the second component as the contents of the medical bag change, wherein movement of the first component activates the indicator means.
2. Apparatus as claimed in Claim 1, wherein the medical bag is a catheter bag or drip bag.
3. Apparatus as claimed in any one of the preceding Claims, wherein the first and second components are hollow tubulars.
4. Apparatus as claimed in any one of the preceding Claims, wherein as the volume of the contents of the medical bag changes, the first component moves in a substantially vertical direction relative to the second component.
5. Apparatus as claimed in any one of the preceding Claims, manufactured from metal.
6. Apparatus as claimed in any one of Claims 1 to 4, manufactured from a plastic material.
7. Apparatus as claimed in any one of Claims 1 to 5, manufactured from stainless steel.

1
2 8. Apparatus as claimed in any one of the preceding
3 Claims, wherein the first and second components are
4 arranged such that the first component is positioned
5 above and engages with the second component.

6
7 9. Apparatus as claimed in any one of the preceding
8 Claims, wherein the lowermost region of the first
9 component is positioned substantially within the
10 uppermost region of the second component.

11
12 10. Apparatus as claimed in any one of the preceding
13 Claims, wherein the diameter of at least the
14 lowermost region of the first component is smaller
15 than the diameter of at least the uppermost region
16 of the second component.

17
18 11. Apparatus as claimed in any one of Claims 1 to 8,
19 wherein the lowermost region of the first component
20 is positioned substantially over the uppermost
21 region of the second component.

22
23 12. Apparatus as claimed in Claim 11, wherein the
24 diameter of at least the lowermost region of the
25 first component is larger than the diameter of at
26 least the uppermost region of the second component.

27
28 13. Apparatus as claimed in any one of the preceding
29 Claims, wherein a compression spring is located
30 within the second component.

31
32 14. Apparatus as claimed in Claim 13, wherein the first
33 component makes contact with the compression spring.

15. Apparatus as claimed in Claims 13 to 14, wherein the first component sits on the compression spring.
16. Apparatus as claimed in Claims 13 to 15, wherein the compression spring is calibrated.
17. Apparatus as claimed in any one of the preceding Claims, wherein one of either the first or second component contains a magnetic array.
18. Apparatus as claimed in Claim 17, wherein the other of the first or second component contains a magnetic detector or sensor.
19. Apparatus as claimed in Claim 18, wherein the magnetic detector or sensor is a read switch.
20. Apparatus as claimed in any one of the preceding Claims, wherein the indicator means is activated when the magnetic detector or sensor comes into proximity with the magnetic array.
21. Apparatus as claimed in any one of the preceding Claims, wherein the indicator means comprises one or more indicator lights.
22. Apparatus as claimed in any one of the preceding Claims, wherein the indicator means comprises an audible signal.
23. Apparatus as claimed in any one of the preceding Claims, wherein the magnetic detector or sensor and

1 magnetic array are brought into proximity with each
2 other as the bag fills.

3
4 24. Apparatus as claimed in any one of the preceding
5 Claims, wherein as the medical bag fills, the weight
6 of the bag moves the first component in a
7 substantially downward direction on the compression
8 spring located in the second component, causing the
9 magnetic detector or sensor and magnetic array to be
10 brought into proximity with each other.

11
12 25. Apparatus as claimed in any one of Claims 1 to 22,
13 wherein the magnetic detector or sensor and magnetic
14 array are brought into proximity with each other as
15 the bag empties.



16
17 26. Apparatus as claimed in Claim 25, wherein as the
18 medical bag empties, the reduction in weight of the
19 medical bag moves the first component in a
20 substantially upward direction on the compression
21 spring located in the second component, causing the
22 magnetic detector or sensor and magnetic array to be
23 brought into proximity with each other.

24
25 27. Apparatus as claimed in any one of the preceding
26 Claims, wherein the indicator means is battery
27 operated.





28
29 28. Apparatus as claimed in any one of the preceding
30 Claims, wherein the indicator means is located on
31 one of the upper or lower components.
32

- 1 29. Apparatus as claimed in any one of Claims 1 to 27,
2 wherein the indicator means is located on both of
3 the upper and lower components.
4
- 5 30. Apparatus as claimed in any one of Claims 1 to 27,
6 wherein the indicator means is located in a remote
7 location to the apparatus.
8
- 9 31. Apparatus as claimed in any one of the preceding
10 Claims, comprising a third tubular component.
11
- 12 32. Apparatus as claimed in Claim 31, wherein the
13 indicator means is located on the third tubular
14 component.
15
- 16 33. Apparatus as claimed in Claims 31 to 32, wherein the
17 third tubular component has battery access.
18
- 19 34. Apparatus as claimed in any one of the preceding
20 Claims which is free standing.
21
- 22 35. Apparatus as claimed in any one of the preceding
23 Claims, wherein the lower component has a base.
24
- 25 36. Apparatus as claimed in Claim 35, wherein the base
26 has a plurality of feet.


1/3

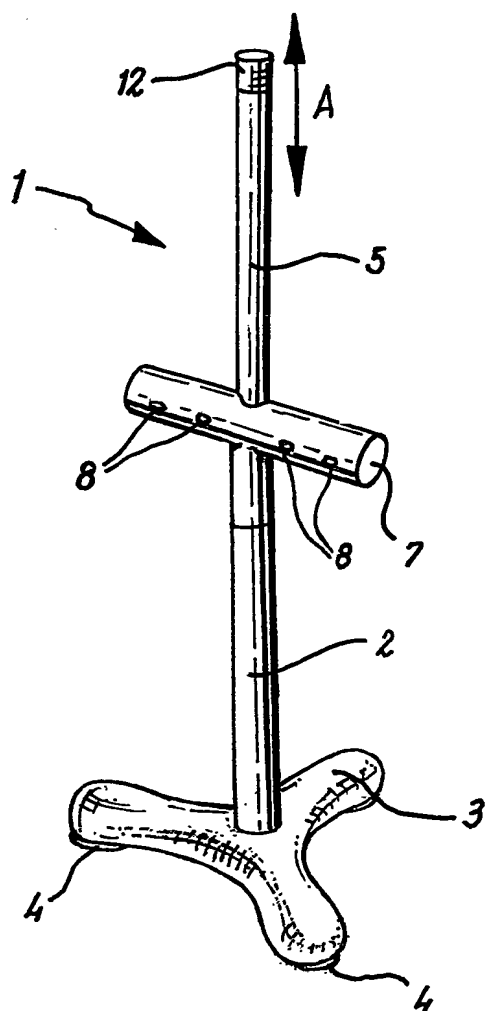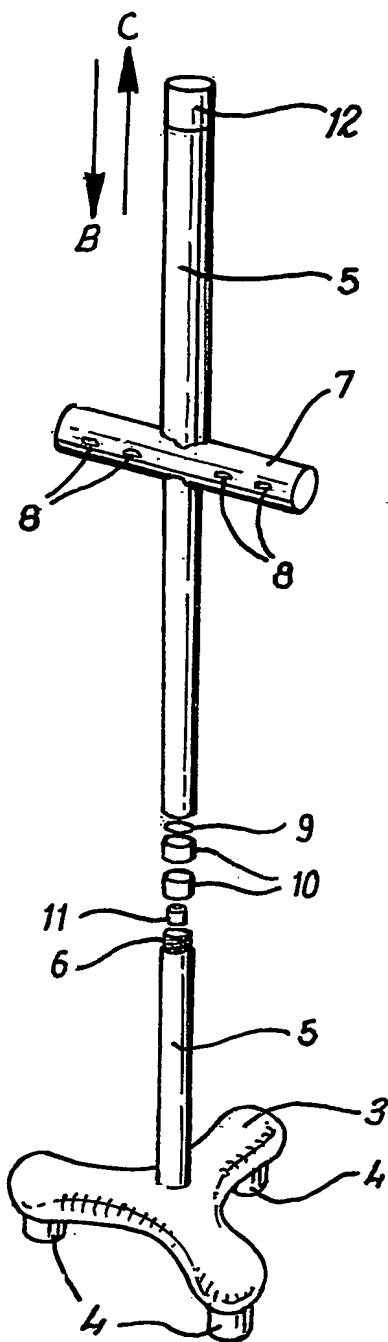**FIG. 1****FIG. 6**

2/3

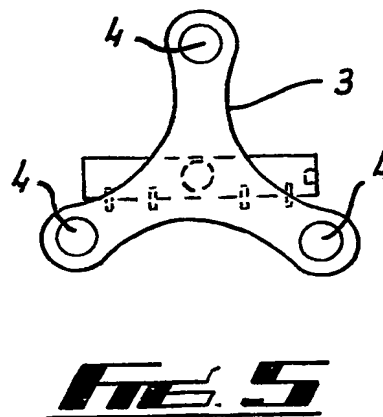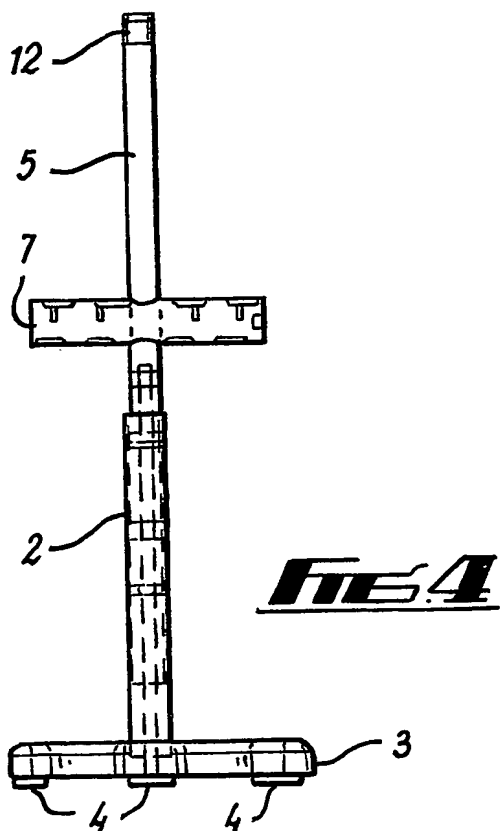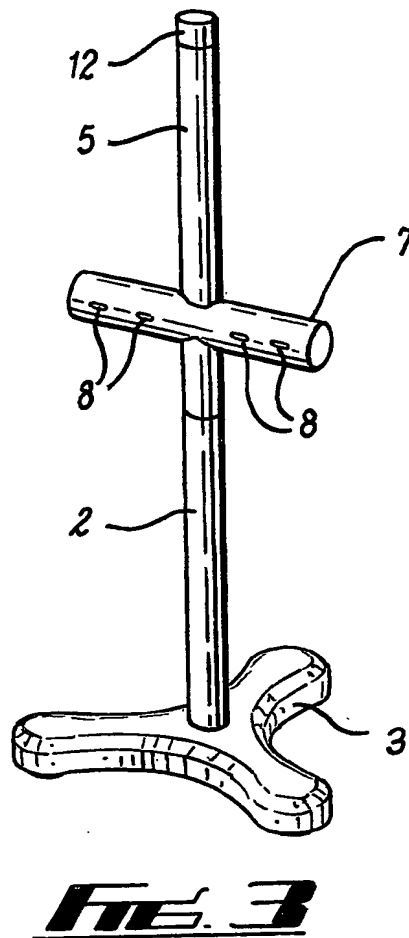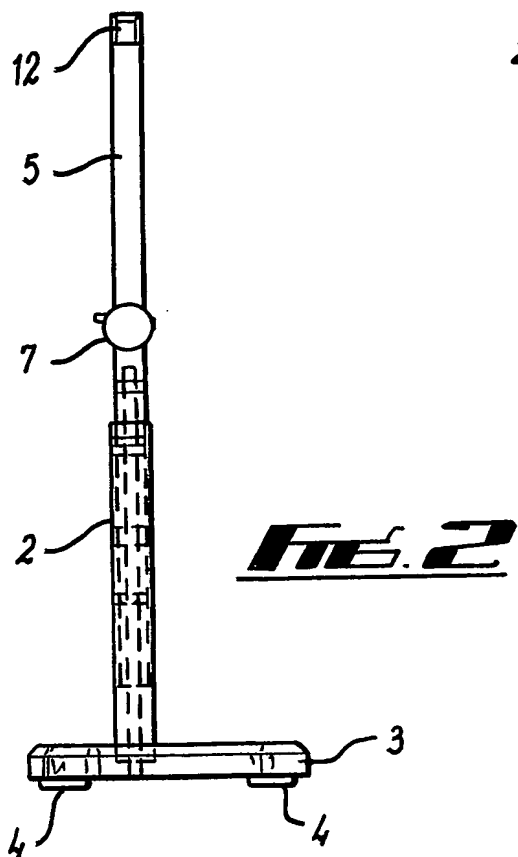

3/3

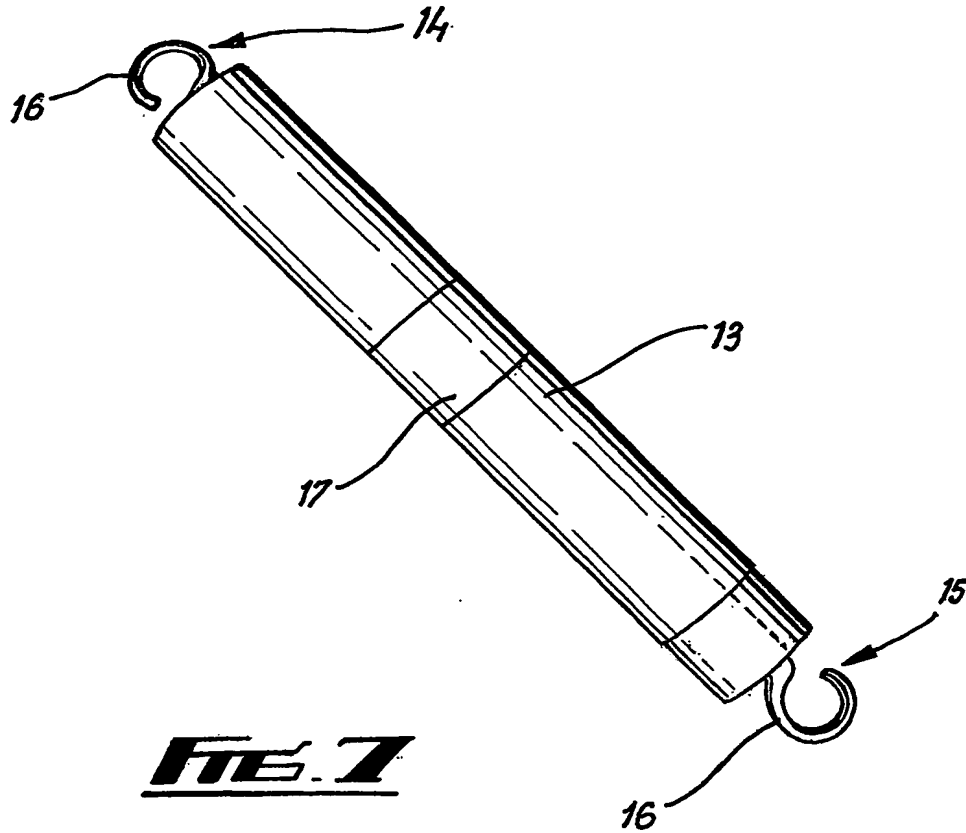

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/01923

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61M1/02 A61J1/00 A61M5/168

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M A61J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 956 130 A (NEWTON DAVID W ET AL) 21 September 1999 (1999-09-21)	1-10, 13-16, 21-28, 30-32, 34-36
Y	column 10, line 11-31 column 16, line 7 -column 21, line 27; figures 1,2,8-10	17-20
Y	US 6 195 012 B1 (YANG DER CHUAN) 27 February 2001 (2001-02-27)	17-20
A	column 3, line 3 -column 4, line 4; figures 5,6	1-16, 21-35
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

25 September 2003

Date of mailing of the international search report

07/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

PASCAL, A

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/01923

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 3 425 415 A (GORDON ERNEST S ET AL) 4 February 1969 (1969-02-04) the whole document	1-7, 10, 31, 32 8, 9, 13-22, 25-28, 30
A	----- US 4 100 480 A (LYTLE DAN R ET AL) 11 July 1978 (1978-07-11) abstract	1-35
A	----- US 4 137 915 A (KAMEN DEAN) 6 February 1979 (1979-02-06) the whole document	1-35
A	----- US 5 728 077 A (TAYLOR RODNEY JOHN ET AL) 17 March 1998 (1998-03-17) abstract -----	1-35

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/01923

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5956130	A	21-09-1999	US 5709670 A	20-01-1998
			US 5522805 A	04-06-1996
			US 5492537 A	20-02-1996
			US 5944668 A	31-08-1999
			AU 4139596 A	30-12-1996
			EP 0847286 A1	17-06-1998
			WO 9640323 A1	19-12-1996
US 6195012	B1	27-02-2001	NONE	
US 3425415	A	04-02-1969	NONE	
US 4100480	A	11-07-1978	NONE	
US 4137915	A	06-02-1979	CA 1122873 A1	04-05-1982
			GB 1592750 A	08-07-1981
US 5728077	A	17-03-1998	AT 200431 T	15-04-2001
			AU 679191 B2	26-06-1997
			AU 5144993 A	09-05-1994
			WO 9408646 A1	28-04-1994
			BR 9307242 A	13-10-1999
			CA 2147158 A1	28-04-1994
			CN 1090207 A ,B	03-08-1994
			DE 69330134 D1	17-05-2001
			EP 0664717 A1	02-08-1995
			ES 2156585 T3	01-07-2001
			GB 2286465 A ,B	16-08-1995
			GR 3036140 T3	28-09-2001
			HK 1007112 A1	01-04-1999
			IL 107224 A	09-05-1999
			JP 8502186 T	12-03-1996
			MX 9306401 A1	31-05-1994
			NZ 256643 A	27-08-1996
			PT 664717 T	30-10-2001
			SG 52675 A1	28-09-1998
			ZA 9307562 A	26-07-1994